

16x12 G click


PID: MIKROE-2758



16x12 G click carries a 16x12 LED display and the IS31FL3733 matrix driver. The click is designed to run on either 3.3V or 5V power supply. It communicates with the target microcontroller over I2C interface, and the following pins on the mikroBUS™ line: INT, RST, CS.

Each LED can be controlled individually – both for on/off control and light intensity.

IS31FL3733 driver features

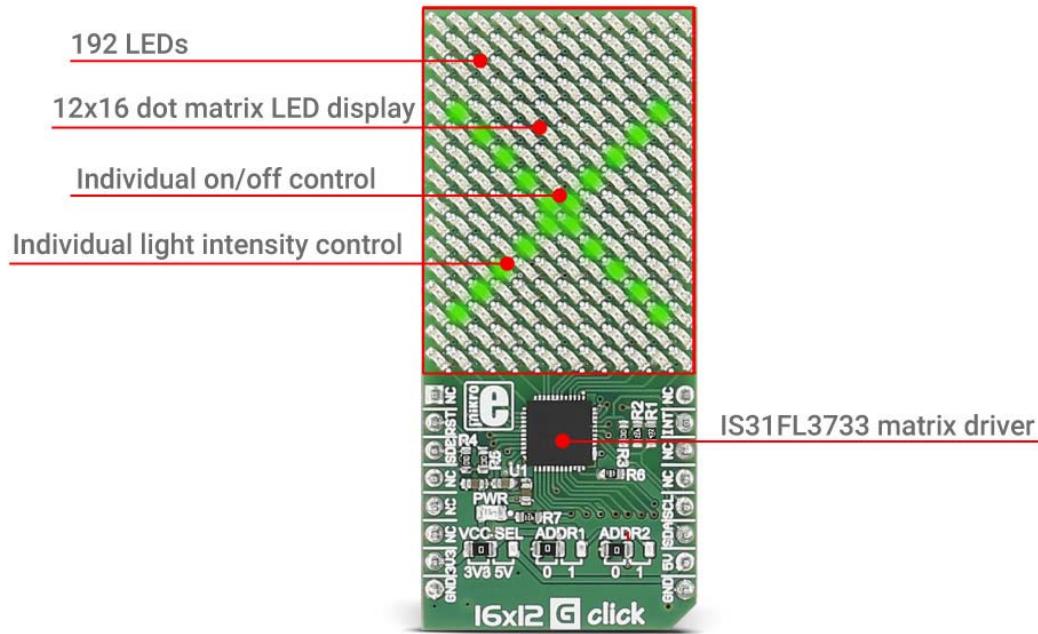

The IS31FL3733 is a general purpose 12×16 LEDs matrix driver with 1/12 cycle rate.

Each of the 192 LEDs can be dimmed individually with 8-bit PWM data, which allows 256 steps of linear dimming.

The driver has selectable 3 Auto Breath Modes for each LED (ABM-1, ABM-2, and ABM-3).

Specifications

Type	LED Matrix
Applications	Gaming devices, small handheld devices, home appliances, IoT devices, etc.
On-board modules	IS31FL3733 matrix driver
Key Features	Selectable 3 Auto Breath Modes for each dot, Individual 256 PWM control steps
Key Benefits	Each of the 192 LEDs can be dimmed individually
Interface	GPIO,I ₂ C
Input Voltage	3.3V or 5V
Click board size	L (57.15 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **16x12 G click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin						Pin	Notes
	NC	1	AN	PWM	16	NC		
Reset	RST	2	RST	INT	15	INT	Interrupt pin	
Standby	SDB	3	CS	TX	14	NC		
	NC	4	SCK	RX	13	NC		
	NC	5	MISO	SCL	12	SCL	I2C clock	
	NC	6	MOSI	SDA	11	SDA	I2C data	
Power supply	+3.3V	7	3.3V	5V	10	+5V	Power supply	
Ground	GND	8	GND	GND	9	GND	Ground	

Jumpers and settings

Designator	Name	Default Position	Default Option	Description
JP1	PWR.SEL.	Left	3V3	Power Supply Voltage Selection 3V3/5V, left position 3V3, right position 5V
JP2	ADDR. 1	Left	0	The last two bits of the I2C address
JP2	ADDR. 2	Left	0	The last two bits of the I2C address

Programming

Code examples for 16x12 G click, written for MikroElektronika hardware and compilers are available on Libstock.

Code snippet

The following code snippet shows the default initialization procedure for 16x12 G click board™.

```
01 IS31FL3733_init( &instance, _IS31FL3733_GND_ADDR, _IS31FL3733_GND_ADDR,
02                         I2C2_Start, I2C2_Stop, I2C2_Write, I2C2_Read );
03     IS31FL3733_setGCC( &instance, 64 );
04     // PWM control mode (default)
05     for( i = 0; i < _IS31FL3733_CS; ++i )
06     {
07         // Set PWM values for all LEDs at i-th row to 55/255 level.
08         IS31FL3733_setLEDPWM ( &instance, i, _IS31FL3733_SW, 55 );
09         // Turn on selected LEDs.
10         IS31FL3733_setLEDState ( &instance, i, _IS31FL3733_SW,
11                                     _IS31FL3733_LED_STATE_ON );
12     }
13     // Clear the matrix
14     IS31FL3733_clearMatrix( &instance );
```