
REVISIONS					
REV	DESCRIPTION	DATE			
F	REVISED PER DCR R060142	03/21/2006			



TUBING VFP21 MARKED AS SHOWN WITH 3.0 [.12]
HIGH CHARACTERS, USING BLACK INK
LOCATED ALONG THIS SURFACE,
REPEAT EVERY 152.4 [6.0].

2. TUBING VFP21 IS UL RECOGNIZED AND IS RATED 125°C [257°F], 600 V

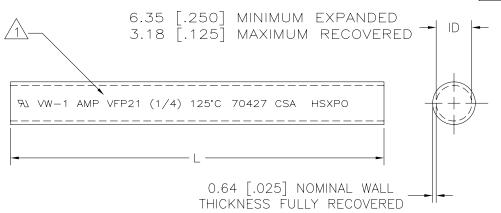

TUBING VFP21 MEETS UL AND CSA VW-1 FLAME TEST.



TUBING FP21 IS UNMARKED AND COMPLIES WITH AMS-DTL-23053/5, CLASS 1

- 5. WEIGHT PER LINEAR FOOT: 2.72 g/.006 lbs.
- 6. MATERIAL: WHITE POLYOLEFIN

If this document is printed it becomes uncontrolled. Check for the latest revision

3	304.8 m [1000 ft]	1-603365-0
3	60.96 m [200 ft]	603365-4
4	60.96 m [200 ft]	603365-3
4	1.22 m [4 ft]	603365-2
3	1.22 m [4 ft]	603365-1
NOTES	LENGTH L	PART NUMBER

SPECIFICATION CONTROL DRAWING

		<u> </u>			IOIV	COI	11116	/ L I	DIVAVVIIV	10
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm.	DRAWN	UNGUYEN	03/21/2006		ctronics	300 Cd	lectronics (onstitution Park, CA, I	Drive	Rayche	m
INCH DIMENSIONS ARE IN BRACKETS.	APPROVED	JBROOKS	03/21/2006	TITLE						
DECIMALS .XX ± .01 [.0004 in] .X ± .1 [.004 in]	CAD NAME RO60142			AMPSULATION VFP21 AND FP21, 1/4 INCH DIAMETER					21,	
ANGLES .X ± 0.5 DEG	THIRD ANGLE - PROJECTION -		SIZE B	CODE IDENT. 06090 T SCALE THIS)	owg. No.	60	3365 sheet 1 0	F 1	

© 2006 TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.