
SPECIFICATIONS

Model Number: ST12B3X Part Number: 19032568A

Aug. 12, 2015



Mechanical Drawing:

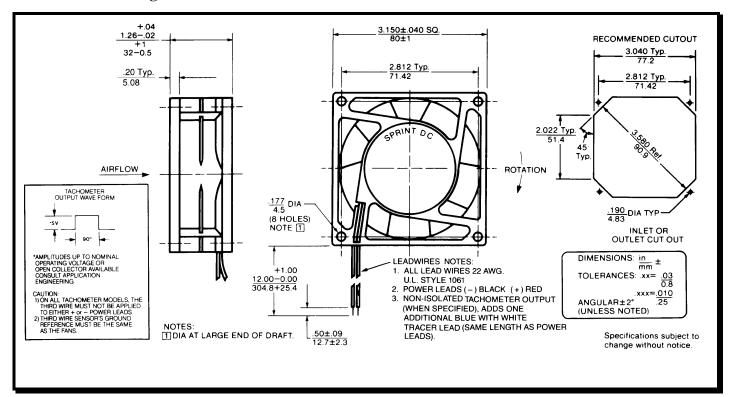

Motor:

Nominal Voltage = 12 vdcOperating Voltage Range = 6-14 vdcNominal Running Current = 0.280 ampsMax. Locked Rotor Current = 0.875 amps**Running Power** = 3.4 watts = 3400 RPMAverage Speed **Bearings** = BallAir Flow = 33 CFMAcoustic $= 40.9 \, dBA$

Construction:

Venturi: Plastic, Black, UL 94V-0 Propeller: Plastic, Black, UL 94V-0

This fan is designed for continuous duty life of 78,000 hours at 40°C.

Life Expectancy:

Additional Features:

Brushless DC Motor

Automatic Restart Capability

Electronic Locked Rotor Protection

Polarity Protected

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

12" Leadwires, AWG 22, UL 1061

= Power (+)Red Black = Return (-)

Agency Approvals:

UL