

General Description

The MAX38801 evaluation kit (EV kit) serves as a reference platform for evaluating the MAX38801 voltage regulator IC. This single-chip, integrated switching regulator provides an extremely compact, highly efficient, fast, accurate, and reliable power delivery solution for low-output voltage applications. The MAX38801 has different programmability options to enable a wide range of configurations.

The EV kit consists of a fully-assembled and tested Printed Circuit Board (PCB) implementation of the MAX38801. Jumpers, test points and input/output connectors are included for flexibility and ease-of-use. Refer to the data sheet for ordering information and more details.

Applications

- Servers/μServers
- I/O and Chipset Supplies
- GPU Core Supply
- DDR Memory—VDDQ and VTT
- Point-of-Load (PoL) Applications

Ordering Information appears at end of data sheet.

Features

- High-Efficiency Solution
 - Up to 96% Peak
 - Up to 92% Full-Load
 - Up to 94% Light-Load Efficiency at 1A with DCM Enabled
- Inductor Valley Current Limit is Configured to 12A ($R_{SEL} = R_1 = 46.4\text{k}\Omega$)
- Programmable Switching Frequency from 400kHz to 900kHz
- Programmable Positive and Negative OCP Limit
- Programmable Reference Voltage with External Input Option
- Fast Transient Response with Quick PWM™ Architecture
- Differential Remote Sense with Open-Circuit Detection
- Percentage-Based Output Power Good and OVP
- Open-Drain Status Indicator (STAT) Pin
- Input Undervoltage and Overvoltage Lockout
- Adaptive Dead Time Control
- Integrated Boost Switch
- 19-Bump WLCSP (2.2mm x 2.8mm) Footprint
- Operation Using Ceramic Input and Output Capacitors

Quick PWM is a trademark of Maxim Integrated Products, Inc.

Quick Start

Required Equipment

- MAX38801 EV kit
- 12V, 10A DC power supply
- Load capable of sinking 12A
- Digital voltmeter
- Oscilloscope

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation. **Caution: Do not turn on power supply until all connections are completed.**

- 1) Connect a 12V power supply to the VDD1 and GND1 banana jacks.
- 2) Make sure the shunt is installed on:
 - a) J16 (1-2) to close the sense line.
 - b) J4 (1-2) to power up the on-board LDO which regulates 1.8V.
 - c) J12 (1-2) to provide the 1.8V bias supply to the regulator from the on-board LDO.
 - d) J15 (3-5) to pull up the STAT pin.
 - e) J15 (4-6) to pull up the OE pin.
- 3) Connect a voltmeter to the VOUT and GND banana jacks (J8, J11, J13, and J14 can be used as well).
- 4) Turn on the power supply.
- 5) Verify that the voltmeter reads 1.05V.

Detailed Description of Hardware

The MAX38801 provides compact high-efficiency power delivery for precision outputs that demand fast transient response. The 19-ball (2.2mm x 2.8mm) CSP package minimizes the PCB area. The EV kit is preset for 1.05V output and can provide up to 12A from a 6.5V to 14V input supply.

Bias Supply

The MAX38801 EV kit has an on-board LDO (U2) that can provide the required 1.8V VCC bias voltage to the regulator as well as the pull up voltage for the Output Enable (OE) input. This allows testing the part using a single external power supply.

To enable the on-board LDO install the shunt on jumper J4. To effectively use the LDO to supply the VCC bias voltage to the regulator also install the shunt on jumper J12.

In order to properly measure the efficiency of the regulator, the LDO should not be active. To disable it, both the shunts on J4 and J12 need to be removed. An external 1.8V, 0.1A current limited power supply needs to be

connected between J12-2 and ground. The same signal should be connected to J10 (1-2) to pull up the OE pin.

Regulator enable

To enable the regulator, OE pin needs to be pulled high. If the on-board 1.8V LDO is active (the shunt on jumper J4 is in place), the output voltage can be used for the purpose. Installing a shunt on J15 (4-6) pulls the OE signal high to 1.8V through a 20kΩ resistor. To shut down the regulator a shunt needs to be installed on J10. This forces the OE pin low.

Status Pin

The MAX38801 has an open collector status (STAT) output to report fault or output under voltage event. Install a shunt on J15 (3-5) to pull up this pin to V_{CC} through a 20kΩ resistor. Since STAT pin is 3.3V tolerant, a shunt on J15 (1-3) can be installed to pull up this pin through a 20kΩ resistor to the 3.3V provided by the on board regulator U3 (install a shunt on J5 (3-4) to enable the LDO).

Scenario Selection

Several parameters of the MAX38801 can be programmed to allow optimization for specific applications. By selecting the appropriate value of resistor R_SEL (R1) and capacitor C_SEL (C4), the optimum set of parameters (scenario) can be programmed.

While R_SEL selects the proper scenario, C_SEL determines the nominal F_{SW}. The MAX38801 features a configuration table to provide a wide range of options. [Table 1](#) shows the scenario table for MAX38801.

Setting the Output Voltage

The output voltage of MAX38801 depends both on the reference voltage (V_{REF}) and the resistor divider ratio.

Equation 1

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_6}{R_9}\right)$$

The reference voltage is selected through RSEL (see [Table 1](#)) and can be either internal or external (refer to the data sheet for more details). In order to optimize the common mode rejection of the error amplifier, choose the voltage divider resistors so that their parallel resistance RPAR is as close as possible to $2\text{k}\Omega$.

Equation 2

$$R_6 = V_{OUT} \times \left(\frac{R_{PAR}}{V_{REF}}\right)$$

$$R_9 = R_6 \times \left(\frac{R_{PAR}}{R_6 - R_{PAR}}\right)$$

where,

R_6 = Top divider resistor

R_9 = Bottom divider resistor

RPAR = Desired parallel resistance of R_6 and R_9

V_{OUT} = Output voltage

V_{REF} = Reference voltage

Operation with External V_{REF}

When using an external reference adopt the configuration shown in [Figure 1](#). Once OE is asserted, the regulator briefly discharges the SENSE- node and releases it as regulation begins. In this case, the soft-start ramp is determined by the external low-pass filter time constant. The external filter time constant needs to be lower than $T_{SS}/3$ in order to avoid premature assertion of STAT pin while the output voltage is still ramping.

The external reference voltage can be applied prior to enabling the regulator, or ramped up right after enable is asserted. In both cases, the low-pass filtered reference voltage at SENSE- pin must reach its final value within T_{SS} .

Typical values for the filter components are:

- RF = $2.2\text{k}\Omega$
- CF = $0.22\mu\text{F}$

Table 1. MAX38801 Configuration Table

R_SEL ($\text{k}\Omega$)	V_{REF} (V)	SOFT- START TIME (T_{SS}) (ms)	VALLEY OCP INCEPTION (A)	OPERATION MODES	REPORTING (CURRENT/ TEMP)	R_SENSE (GAIN) (M Ω)	F_SW (kHz)			T_STAT (μs)						
							C_SEL									
							0pF	200 pF	820 pF							
1.78	0.95	6	12	CCM	Current	2.1	700	800	900	2000						
2.67			15	CCM/DCM												
4.02		3	12	CCM												
6.04			15	CCM/DCM												
9.09	Ext.	1.5	12	CCM												
13.3																
20.0	0.6	6	18	CCM/DCM	Temp	1.05	400	500	600	128						
30.9				CCM												
46.4		12	CCM/DCM	Temp												
71.5				Current												
107				CCM												
162	Ext.	1.5	15	CCM	Temp	2.1	400	500	600	128						

Input Voltage Monitoring

VDD1 and GND1 sense points as well as J3 can be used to monitor the input supply.

Output Voltage Monitoring

J11 and J13 monitor the output voltage. These test points should not be used for loading. Use scopejack J14 to monitor the output voltage ripple on an oscilloscope.

Efficiency Measurement

The following steps describe how to measure the regulator efficiency.

- 1) Connect a 12V power supply to the VDD1 and GND1 banana jacks. To avoid the input voltage to drop at high load due to power losses on connection cables connect the sense lines of the power supply to VDD1 and GND1 headers.
- 2) Connect an external 1.8V, 0.1A current limited power supply between J12-2 and ground
- 3) Connect the same power supply to J10-1 to enable the regulator.

- 4) Connect a load to the VOUT and GND banana jacks for better results. J8 can also be used for low currents.
- 5) Make sure the shunt is installed on J16 (1-2) to close the sense line
- 6) Remove all the other jumpers.
- 7) Connect a voltmeter to J11 or J13.
- 8) Turn on the power supply.
- 9) Measure V_{IN} , I_{IN} , V_{OUT} , I_{OUT} , V_{BIAS} , and I_{BIAS} .
- 10) Calculate the efficiency as:

Equation 3

$$\eta = \left(\frac{V_{OUT} \times I_{OUT}}{(V_{IN} \times I_{IN}) + (V_{BIAS} \times I_{BIAS})} \right)$$

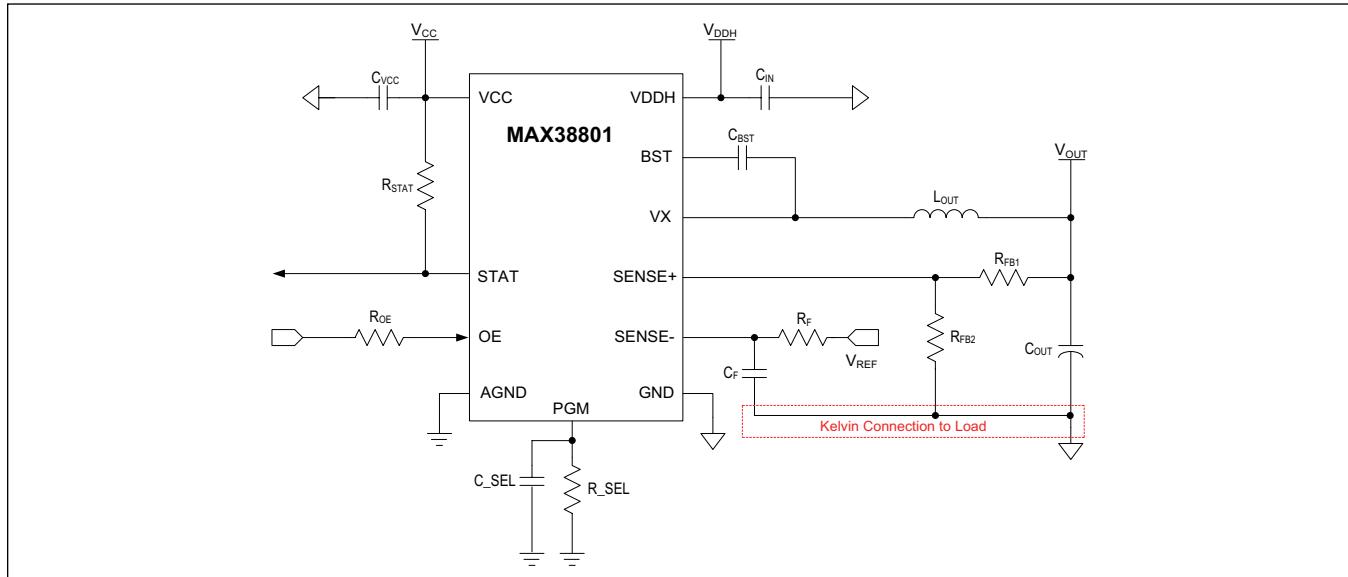


Figure 1. Electrical Connections to Use the External Voltage Reference Feature.

MAX38801 EV Kit Bill of Materials

ITEM	REFDES	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
1	C1, C2	-	2TPSE157MN016R100	AVX	160U	CAPACITOR; SMT; 7343; TANTALUM; 150uF; 16V; 20%; TPS; -55°C to +125°C	
2	C3	-	CA402XTR60104KNE; C105B104K05NNC; GRM155R71C104KA88; C1005XR1C104K; C1042XTR71C104K; EMK1105B104KV	YENKEI LTD.; SAMSUNG ELECTRONICS MURATA; TDK; YAGEO PHICOM; TAYO YUDEN	0.1uF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1uF; 16V; TOL=10%; TG=55 DEGC TO +125 DEGC; TC=XTR.	
3	C4	-	1ECJ0EB1E821K	PANASONIC	820PF	CAPACITOR; SMT (0402); CERAMIC CHIP; 820PF; 25V; TOL=10%; MODEL=EW SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
4	C5, C6, C10, C11	-	4C3216XTR1C106MM60AC	TDK	100F	CAPACITOR; SMT (1206); CERAMIC CHIP; 100uF; 16V; TOL=20%; MODEL=C SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
5	C7, C21, C54	-	3EUK10TB105MA	TAYO YUDEN	1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1UF; 16V; TOL=20%; MODEL=H SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
6	C8	-	1GRM188R71E471KA12	MURATA	0.47uF	CAPACITOR; SMT (0603); CERAMIC CHIP; 0.47uF; 25V; TOL=10%; MODEL=GRM SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
7	C9, C55	-	2JMK105BB1A475MVF; C1005XR01475M050BC	TAIYO YUDEN; TDK	4.7uF	CAPACITOR; SMT (0603); CERAMIC CHIP; 4.7uF; 6.3V; TOL=20%; TG=55 DEGC TO +85 DEGC; TC=XTR	
8	C12, C15, C16, C20, C34, C42, C44	-	C0805C2261N9PAC; GRM21BFR6U226ME39; C105B1226H10CL0N	KEMET; MURATA; TAIYO YUDEN; SAMSUNG ELECTRO-MECHANICS	220uF	CAPACITOR; SMT (0805); CERAMIC CHIP; 220uF; 6.3V; TOL=20%; TG=55 DEGC TO +125 DEGC; TC=X5R	
9	C13, C14, C17-C19, C41, C46, C50	-	8C2012X6S01226M125AB; GRM21BC30U	TDK; MURATA	220uF	CAPACITOR; SMT (0805); CERAMIC CHIP; 220uF; 6.3V; TOL=20%; TG=55 DEGC TO +105 DEGC; TC=X6S	
10	C24	-	CA402C103K3RAC; GRM155R71E153KA01; C1005XTR1E103K	KEMET; MURATA; TDK	0.01uF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.01uF; 25V; TOL=10%; TG=55 DEGC TO +125 DEGC; TC=XTR	
11	C25, C56	-	2C0402XTR250-153KNEGRM155R71E153KA61	YENKEI LTD.; MURATA	0.015uF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.015uF; 25V; TOL=10%; TG=55 DEGC	
12	C36	-	CA402XTR63-105NP; C1005XR0105K; 1GRM155R6U105KE19; JMK105B1105KV	YENKEI LTD.; TDK; MURATA; TAIYO YUDEN	1uF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1uF; 6.3V; TOL=10%; TG=55 DEGC TO +85 DEGC; TC=X5R	
13	C37	-	1C1005XTR146S2K	TDK	6800PF	CAPACITOR; SMT (0402); CERAMIC CHIP; 6800PF; 50V; TOL=10%; MODEL=C SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
14	C38	-	1C0402C153K4RAC; GRM155R71C153KA01	KEMET; MURATA	0.015uF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.015uF; 16V; TOL=10%; TG=55 DEGC TO +125 DEGC; TC=XTR	
15	C39	-	1C1005XTR14222C050BA	TDK	2200PF	CAPACITOR; SMT (0402); CERAMIC CHIP; 2200PF; 50V; TOL=10%; MODEL=C SERIES; TG=55 DEGC TO +125 DEGC; TC=XTR	
16	D1	-	12EZ15D5	MICRO COMMERCIAL COMPONENTS	15V	DIODE; ZNR; THROUGH HOLE; AXIAL LEAD (DO-41); VZ=15V; IZ=0.12A	
17	GND1, TP1-TP3, VDD1, VOUT	-	6108-0740-001	EMERSON NETWORK POWER	108-0740-001	CONNECTOR; MALE; PANELMOUNT; BANANA JACK; STRAIGHT; 1PIN	
18	GND1_HEADER, GND2_19_VDD1_HEADER, VX1	-	5PEC01SAAN	SULLINS ELECTRONICS CORP	PEC01S AN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 1PIN	
19			6MAXIMPAD	N/A	N/A	MAXIM PAD	EVK KIT PARTS; MAXIM PAD; NO WIRE TO BE SOLDERED ON THE MAXIM PAD

MAX38801 EV Kit Bill of Materials (continued)

ITEM	REF_DES	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
20	J1, J4, J10-J13, J16	-	7 PEC02SAAN	SULLINS	PEC02S AAN	CONNECTOR; MALE; THROUGH-HOLE; BREAKAWAY; STRAIGHT; 2PINS	
21	J3, J4	-	2 SCOPE_PROBE_JACK	MAXIM	SCOPE_ PROBE_ JACK	EVKIT PART:SCOPE_PROBE_JACK	
22	J5, J15	-	2 PEC03DAAN	SULLINS ELECTRONICS CORP.	PEC03D AAN	CONNECTOR; MALE; THROUGH-HOLE; BREAKAWAY; STRAIGHT THROUGH; 6PINS; 85 DEGC TO +125 DEGC	
23	J7	-	1 PEC04SAAN	SULLINS ELECTRONICS CORP.	PEC04S AAN	CONNECTOR; MALE; THROUGH-HOLE; BREAKAWAY; STRAIGHT; 4PINS	
24	J8	-	1 ED120/2DS	ON-SHORE TECHNOLOGY INC.	ED120/2 DS	CONNECTOR; FEMALE; THROUGH-HOLE; BLUE TERMINAL BLOCK; STRAIGHT; 2PINS	
25	L1	-	1 PCMC063T-R20MIN	SUSUMU CO LTD	0.20uH	INDUCTOR; SMT; CHOKE; TOL=>+20%; 24A;	
26	R1	-	1 CR0202-16V-462FT; CR0W040246K4FK	VENKEL LTD.; VISHAY DALE	46.4K	RESISTOR; 0402; 46.4K OHM; 1%; 100PPM; 0.063W; THICK FILM	
27	R2, R3	-	2 CRG0402F10K	TE CONNECTIVITY	10K	RESISTOR; 0402; 10K OHM; 1%; 100PPM; 0.063W; THICK FILM	
28	R16	-	5 RC0402JR-070RL; CR0402-16V-000RJT	YAGEO PHYCOM; YENKEL LTD.	0RESISTOR; 0402; 0 OHM; 5%; JUMPER; 0.063W; THICK FILM		
29	R5, R8, R12	-	3 ERJ-2GE/203X	PANASONIC	20K	RESISTOR; 0402; 20K OHM; 5%; 200PPM; 0.10W; THICK FILM	
30	R6, R13	-	2 CRCW0402K10FK	VISHAY DALE	2.1K	RESISTOR; 0402; 2.1K; 1%; 100PPM; 0.0625W; THICK FILM	
31	R9	-	1 ERA-24EB2301X	PANASONIC	28K	RESISTOR; 0402; 2.8K OHM; 0.1%; 25PPM; 0.063W; METAL FILM	
32	R10	-	1 CRCW0402K100JK	VISHAY DALE	1K	RESISTOR; 0402; 1K OHM; 5%; 100PPM; 0.063W; METAL FILM	
33	R14	-	1 RCC-0402PW200RF	INTERNATIONAL MANUFACTURING SERVICE	200	RESISTOR; 0402; 200 OHM; 1%; 100PPM; 0.080W; THICK FILM	
34	SU1-SU6	-	5 STC02SYAN	SULLINS ELECTRONICS CORP.	STC02S YAN	TEST POINT; JUMPER; STR; TOTAL LENGTH=0.256IN; BLACK; INSULATION=FBT CONTACT=PHOSPHOR BRONZE; COPPER PLATED TIN OVERALL	
35	U1	-	1 MAX38801HCS+	MAXIM	MAX38801HCS+ EVKIT PART:IC_VREG; INTEGRATED; STEP-DOWN SWITCHING REGULATOR WITH SELECTABLE APPLICATION CONFIGURATION; CSP19		
36	U2	-	1 LP2992AM5-18NOPB	TEXAS INSTRUMENTS	LP2992AM5-18NOPB B	IC; VREG; MICROPOWER 250-mA LOW-NOISE ULTRALOW-DROPOUT REGULATOR DESIGNED FOR USE WITH VERY LOW-ESR OUTPUT CAPACITOR; SOT23-5	
37	U3	-	1 LP2992AM5-3.3NOPB	TEXAS INSTRUMENTS	LP2992AM5-3.3NOPB B	IC; VREG; MICROPOWER 250-mA LOW-NOISE ULTRALOW-DROPOUT REGULATOR DESIGNED FOR USE WITH VERY LOW-ESR OUTPUT CAPACITOR; SOT23-5	
38	PCB	-	1 MAX38801	MAXIM	PCB; MAX38801	PCB FOR MAX38801	
39	C28, C29	DNP	0 N/A	N/A	OPEN	PACKAGE OUTLINE 7343 HEIGHT 4.3MM ELECTROLYTIC CAPACITOR	
40	C30, C33, C40, C43, C45, C47-C49, C52, C53, C22, C26, C27	DNP	0 N/A	N/A	OPEN	PACKAGE OUTLINE 0805 NON-POLAR CAPACITOR	

MAX38801 EV Kit Bill of Materials (continued)


ITEM	REFDES	DNID NP	QTY	MFG PART #	MFG	VALUE	DESCRIPTION	COMMENTS
41	C51, C57	DNP	0	N/A	N/A		PACKAGE OUTLINE 0402 NON-POLAR CAPACITOR	
42	R17	DNP	0	N/A	N/A		PACKAGE OUTLINE 0402 RESISTOR	
43	L1	DNP	0	074439344001	WURTH ELECTRONICS INC	0.18uH	INDUCTOR, SMT, SHIELDED; 0.18uH; TOL=+/-20%; 20A;	for L1
	TOTAL		93					

NOTE: DNL-> DO NOT INSTALL(PACKOUT) ; DNP-> DO NOT PROCURE


MAX38801 Evaluation Kit

Evaluates: MAX38801


MAX38801 EV Kit Schematic

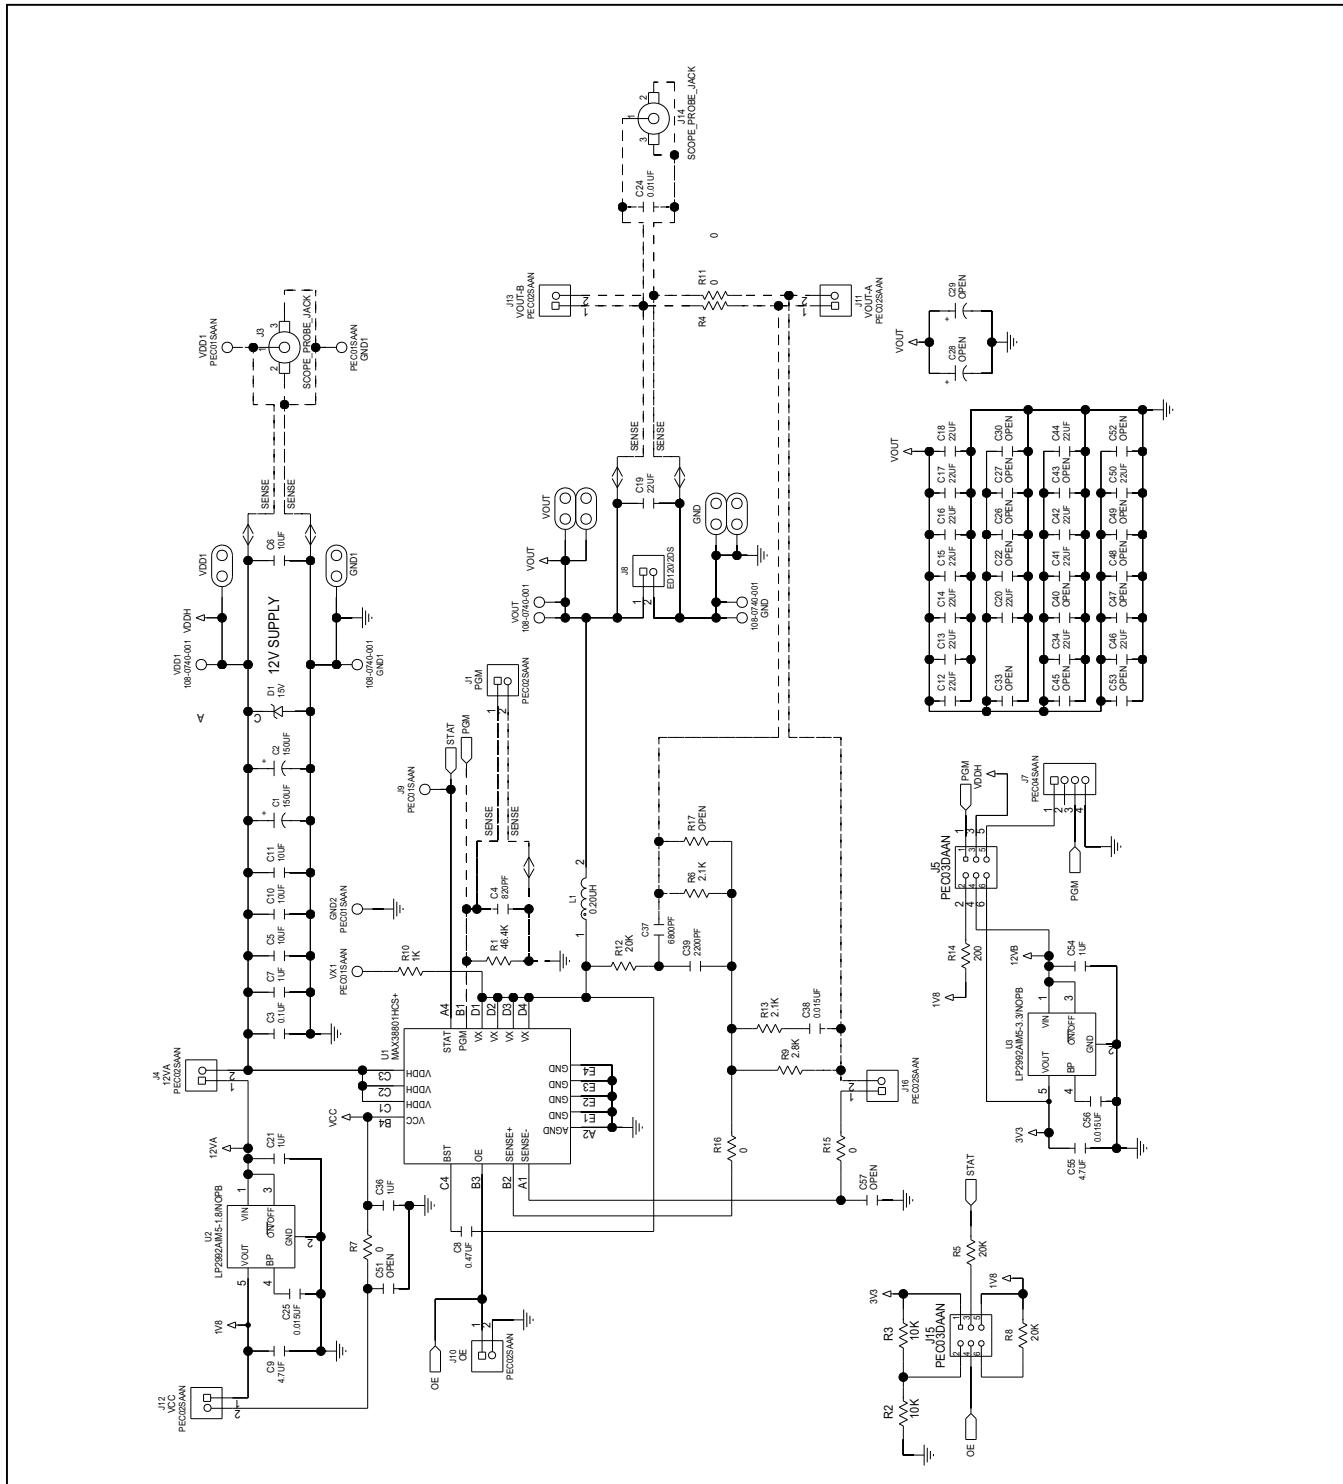


MAX38801 EV Kit PCB Layout Diagrams

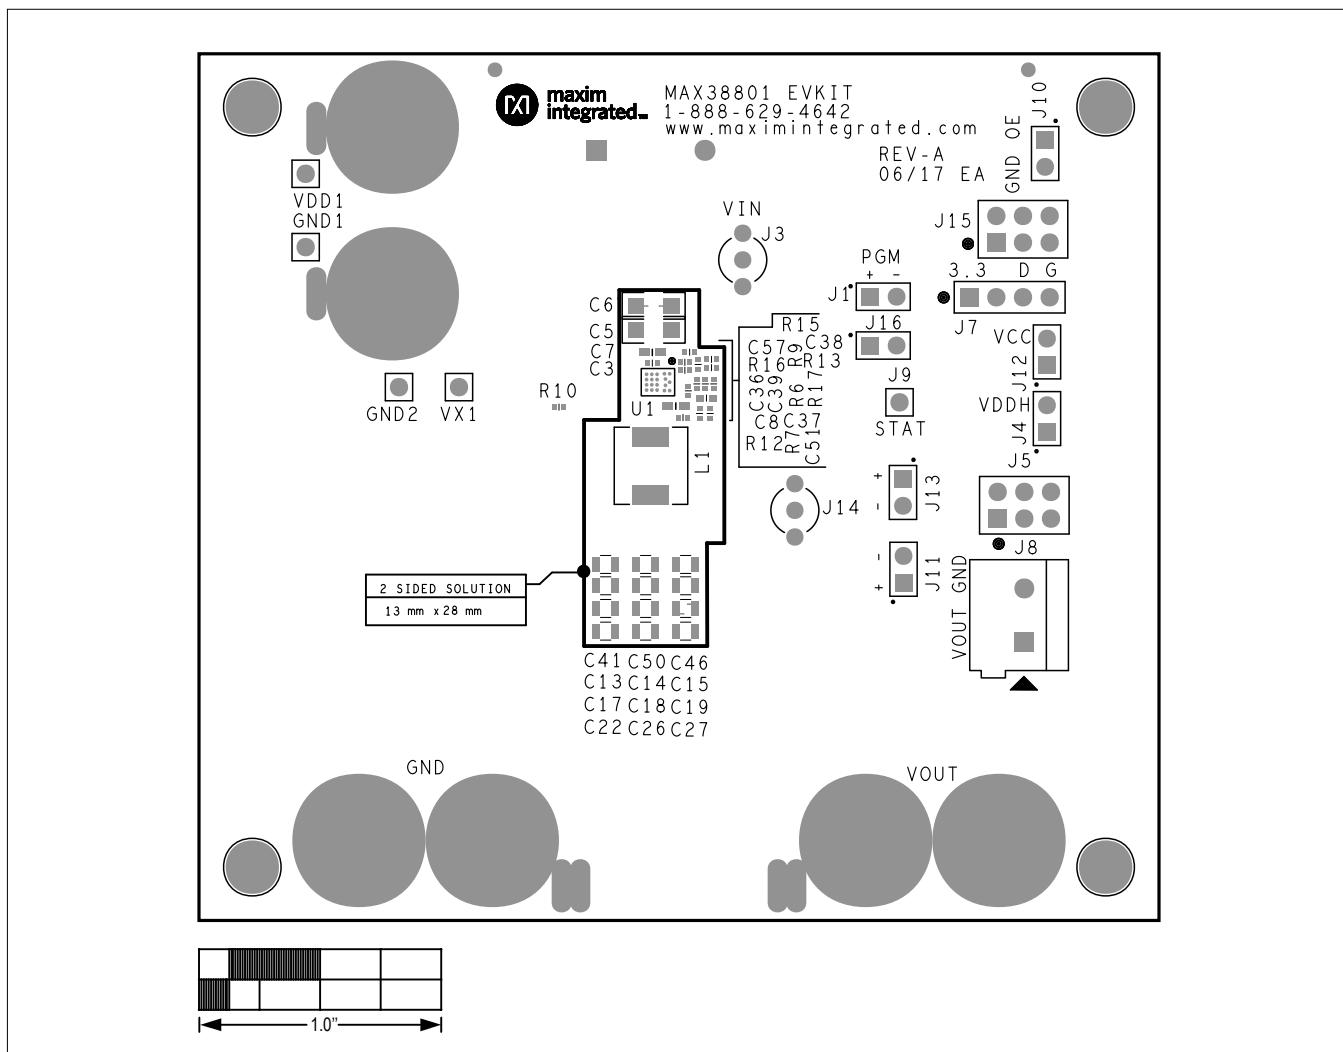


MAX38801 EV Kit—Top Silkscreen

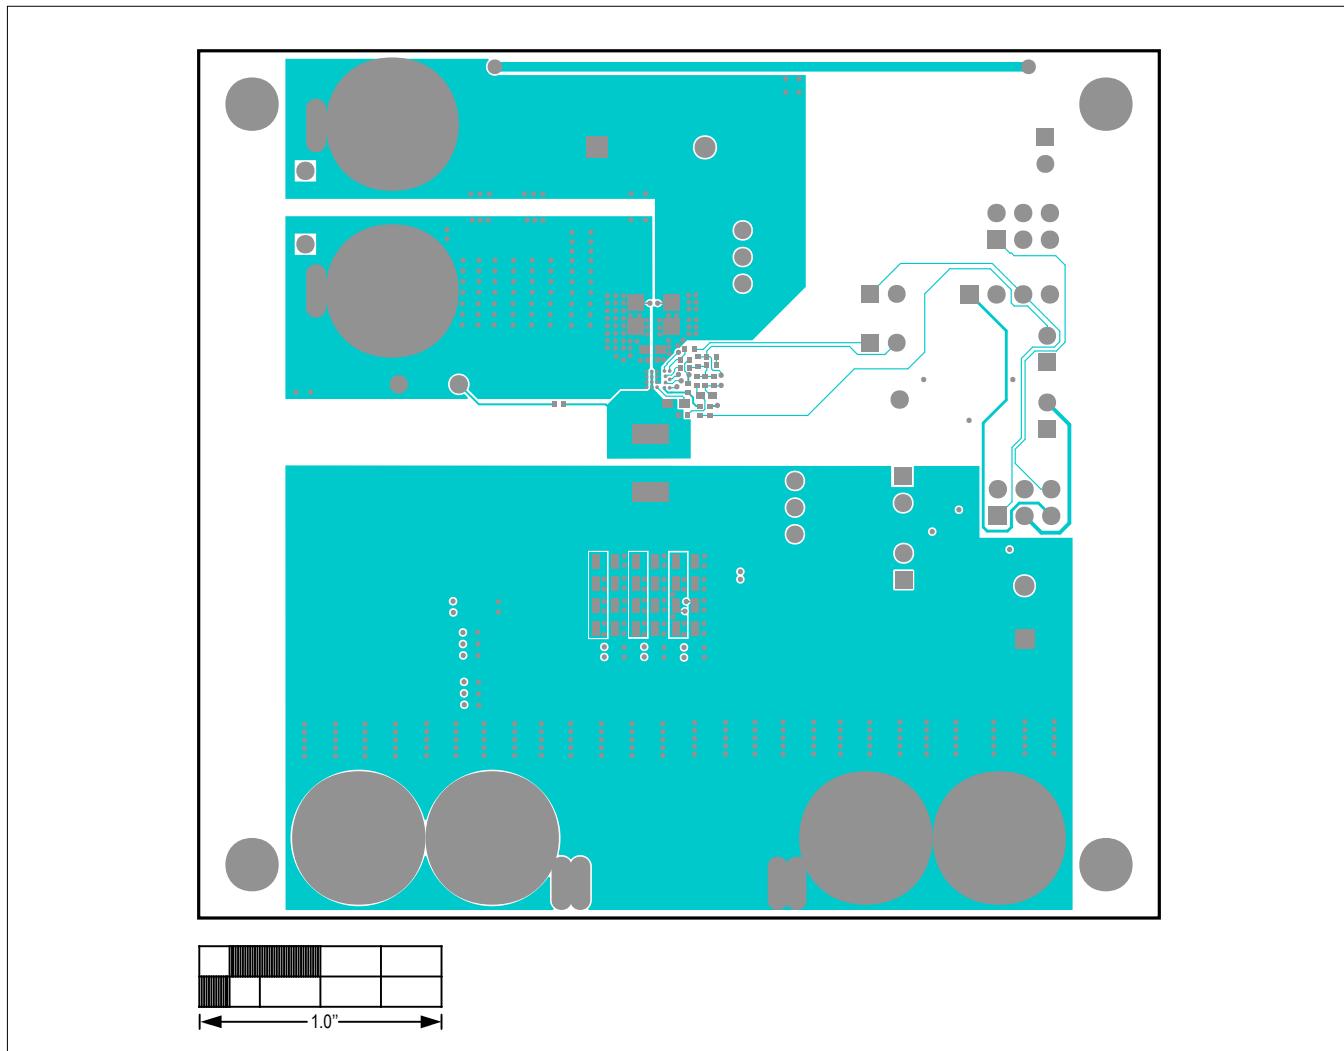MAX38801 EV Kit PCB Layout Diagrams (continued)

MAX38801 EV Kit—Top View

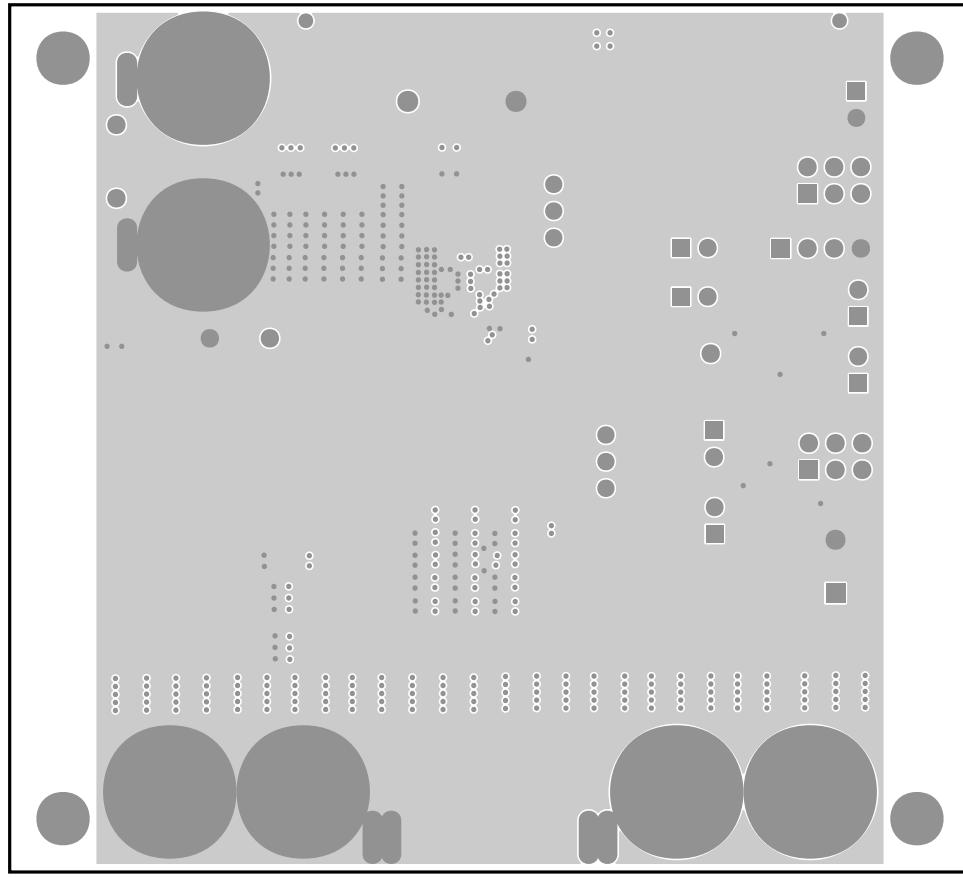
MAX38801 EV Kit PCB Layout Diagrams (continued)

MAX38801 EV Kit—Second Layer

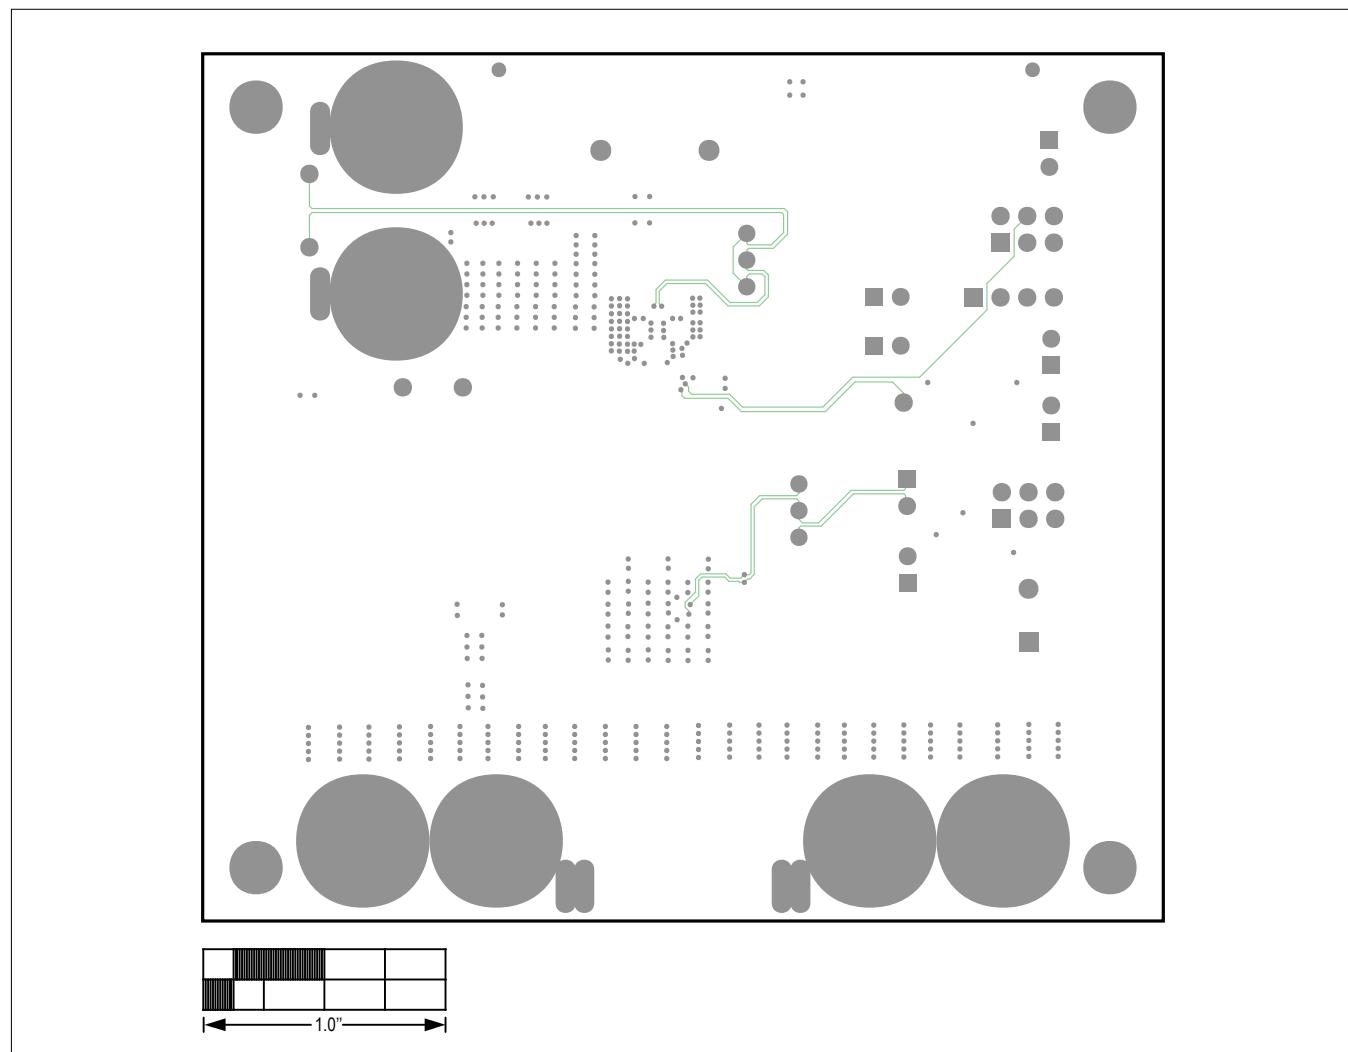
MAX38801 EV Kit PCB Layout Diagrams (continued)

MAX38801 EV Kit—Third Layer

MAX38801 EV Kit PCB Layout Diagrams (continued)

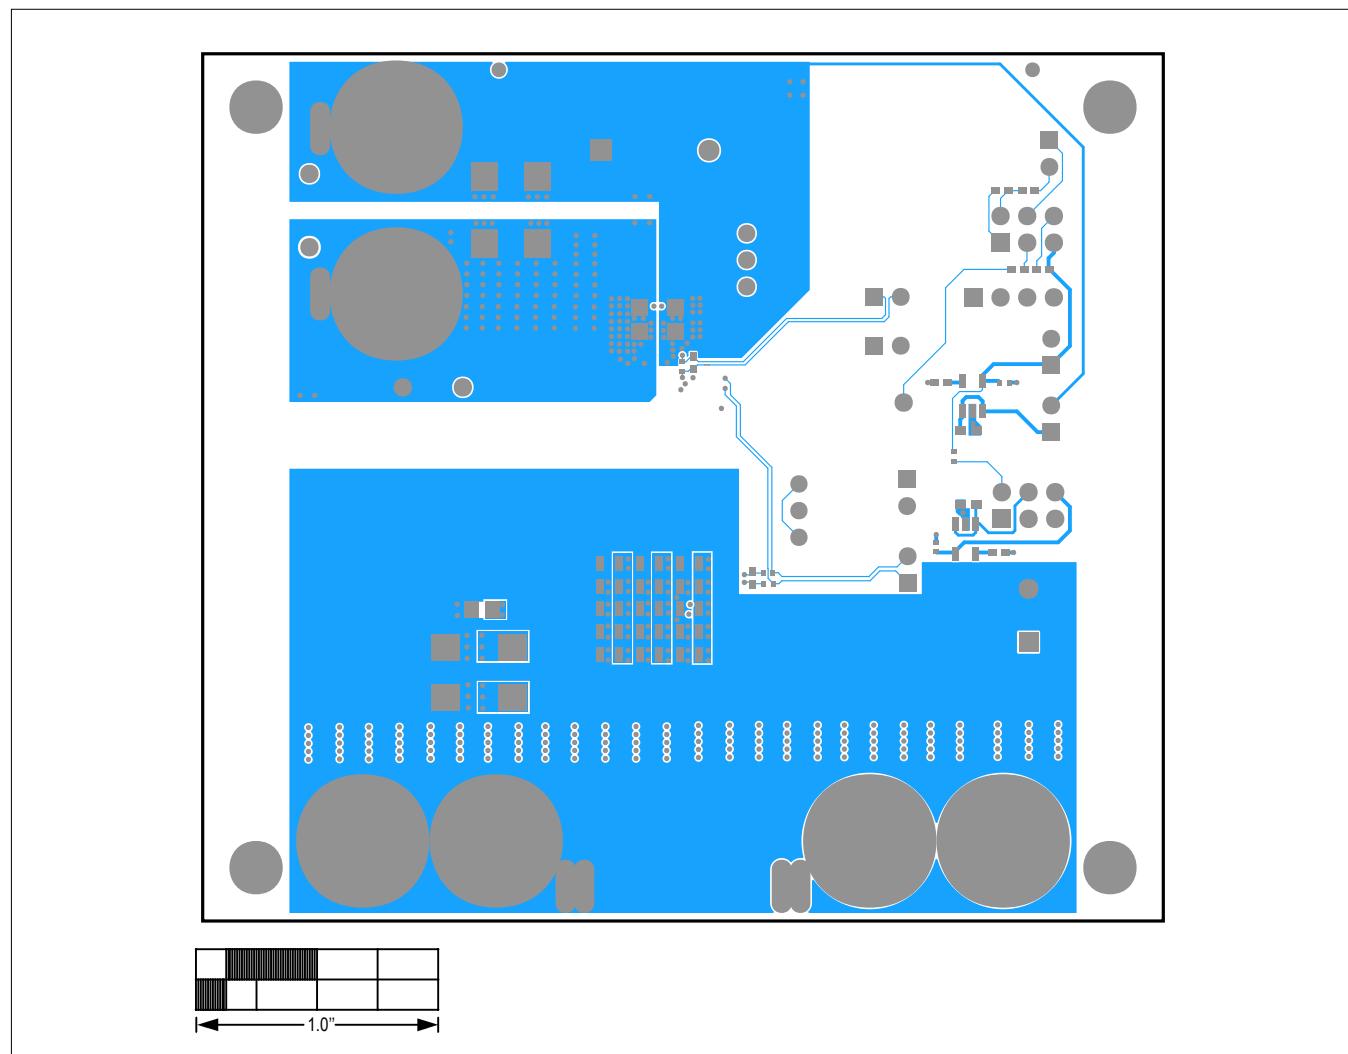

MAX38801 EV Kit—Bottom View

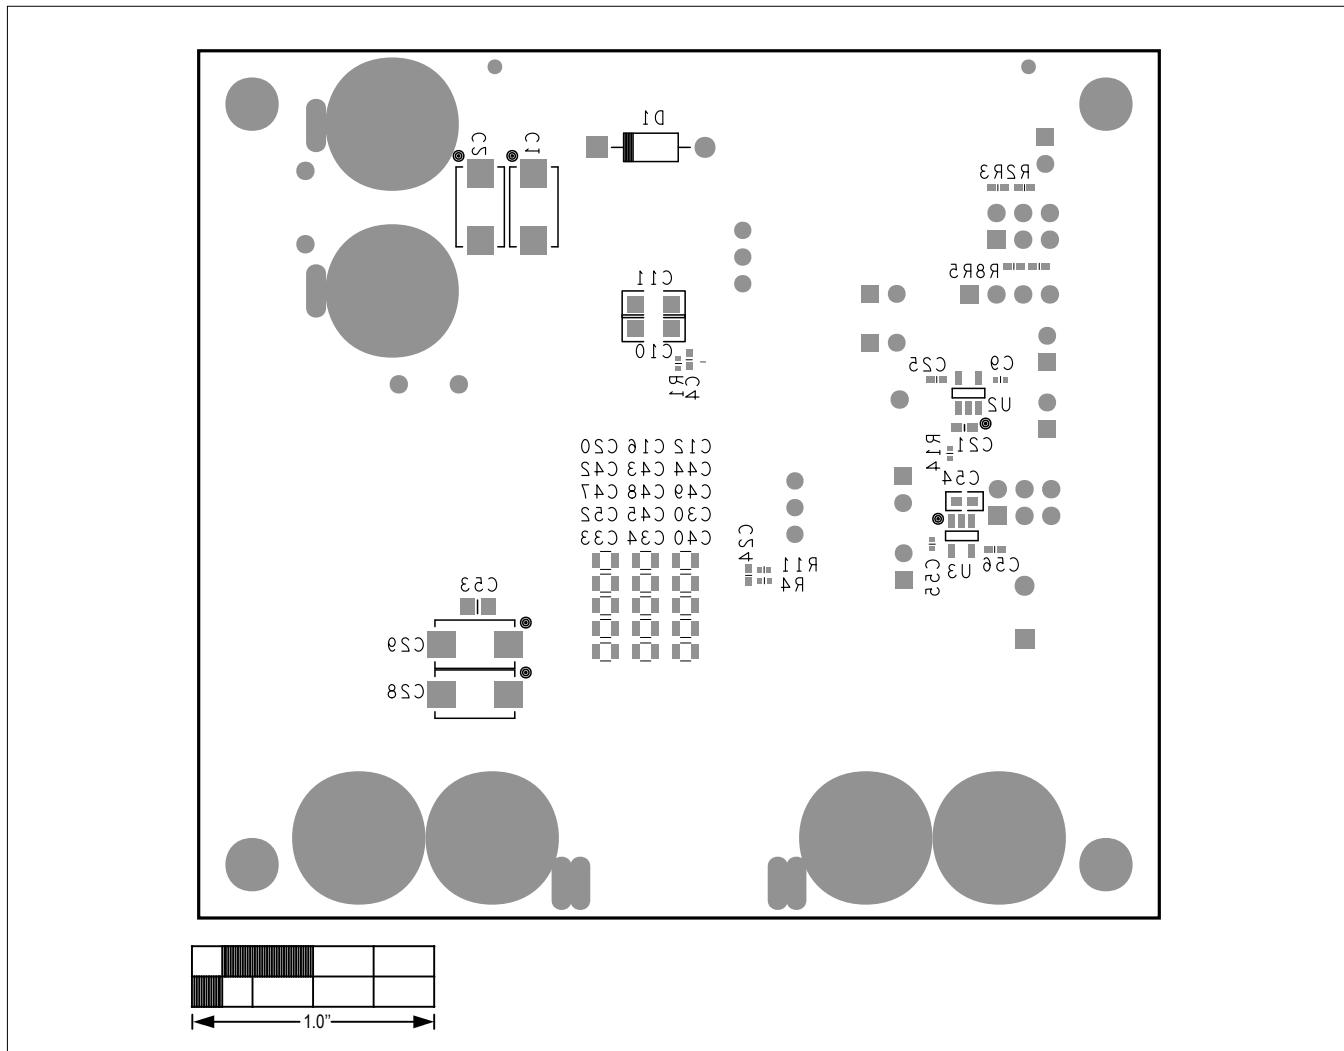MAX38801 EV Kit PCB Layout Diagrams (continued)

MAX38801 EV Kit—Bottom Silkscreen

Ordering Information

PART	TYPE
MAX38801EVKIT#	EV Kit

#Denotes an RoHS-compliant device

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	8/17	Initial release	—
1	5/18	Updated <i>Bill of Materials</i>	5–7

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.