

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	8 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	3/4 in.		
Stud Size	#10		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	RED		
Panduit Die Index No. on Barrel	P21		
Alternate Industry Die Index No. () on Barrel	N/A		





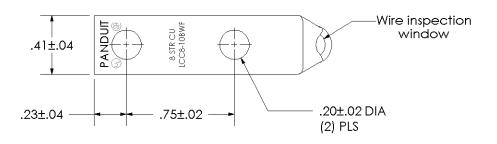

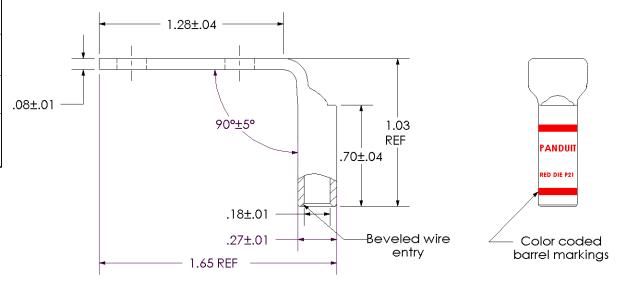

REV	DATE	БТ	СНК	DESCRIPTION	ECN	N/A	
DEV	DATE	BY	СПК	DESCRIPTION	ECN	SCALE	DRAWING I
00	9/02	SAB	DRL	RELEASED	10342	LC0 Copper Lug - Two-Hole, Long	
							57

ORP. TINLEY PARK, ILLINOIS

C8-10BWF-L Barrel with Window, 90° Angle Tongue

NO / CAD FILE

LCC8-10BWF-CUST