
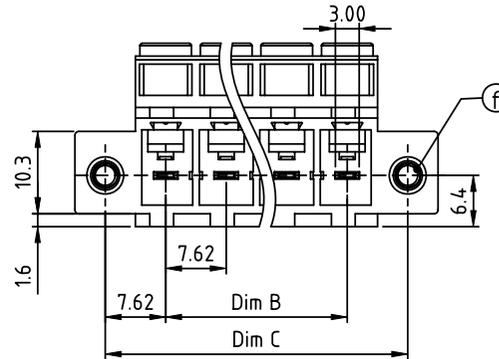


PRODUCT NUMBER	PITCH
KTxx01x200J0G	7.62 mm


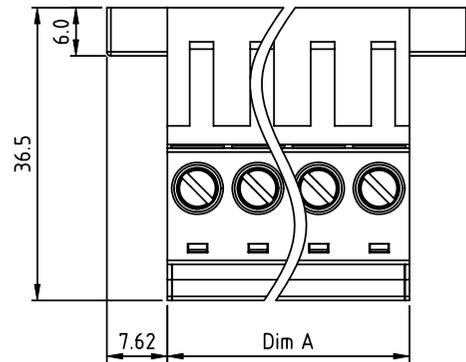


Material:

- Item ① Terminal(housing) : Thermoplastic (UL94V-0)
- Item ② Terminal(cover) : Thermoplastic(UL94V-0) ( ET 7.62 )
- Item ③ Terminal screw : Steel Zinc plating " - " slot type ( ET 7.62 )
- Item ④ Clamp : Brass, Ni plated ( ET 7.62 )
- Item ⑤ Female contact : Copper. Tin plated
- Item ⑥ With flange Nut : Steel Zinc plating M3 ( VC 7.62 )

Electrical cULus

- Voltage rating: 600VAC
- Current rating: 41A
- Solid wire (AWG): 8-24
- Stranded wire(AWG): 8-24
- Torque: 9.0 Lb-In
- Screw: M3.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

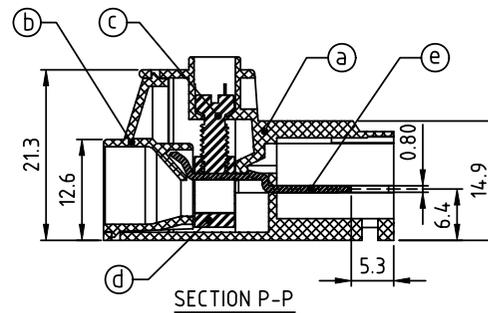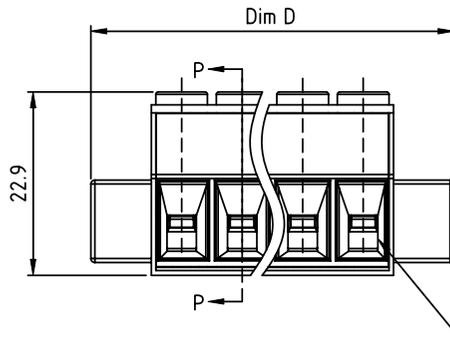

N=Number of poles

Dim A	Nx7.62
Dim B	(N-1)x7.62
Dim C	(N+1)x7.62
Dim D	(N+2)x7.62

Dimension

Poles	Tolerance
2P-5P	±0.20
6P-10P	±0.30
11P-16P	±0.40

PART NO.: KT xx 01 x 2 00J0 G

	Color	RoHS compliant
Solid block	0 Black (RAL9005)	(lead<4%)
No. of poles	2 Red (RAL3001/D)	In copper Alloy
02 2 poles	3 Orange(RAL2011/P)	
03 3 poles	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
16 16 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK	
ltr ecn no dr date		tolerances unless otherwise specified		MM	title TERMINAL BLOCK PLUGGABLE PLUG,FLANGE WITH NUT	
angles		X.±0.5	X.X±0.3		scale	
X*±1*		X.XX±0.1			dwg no KTxx01x200J0G	
dr	EVIN ZHONG	050614			sheet 1 of 1	size A4
enr	EVIN ZHONG	050614				
chr	HANKE FENG	050614				
appd	SHI JUN	050614			type CUSTOMER Drawing	
sheet index	revision sheet	A 1				