


ROHS COMPLIANT

PRODUCT DATA DRAWING



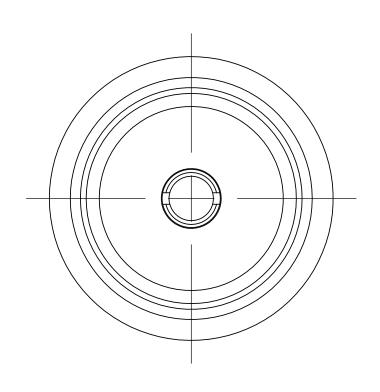

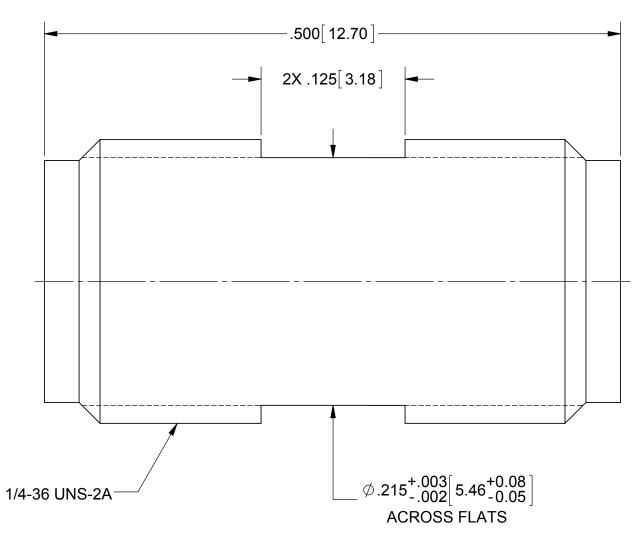

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

LOCK RING & CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY: PASSIVATED PER AMS-2700

GOLD PER ASTM B488, TYPE II, CONTACT:

CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

MATERIAL: SEE NOTES
FINISH: SEE NOTES
SURFACE AREA: N/A
PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWIN IS THE SOLE PROPERTY OF SV MICROWAVE, IN ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.
 · · · · · · · · · · · · · · · · · · ·

NOTES	DIMENSIONS ARE IN INCHES TOLERANCE			
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°			
NOTES	X°X' ±15 DECIMAL: .X ±.030 .XX ±.010			
	.XXX ±.005			
ı	INTERPRET DIMENSIONS AND TOLERANCE:			
ΓARY	PER ASME Y14.5M - 1994			
NED IN THIS DRAWING	THIRD ANGLE PROJECTION			

,	UNLESS OTHERWISE SPECIFIED
	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63-MIL-STD-10. 6) DIA-S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS

	TYTELIIO VE TEE BOTTIO	
CTION	DRAWN:	BNK 10/29/15
1	CHECKED:	DAL 10/29/15
Ţ	APPROVED:	DGG 09/09/76

	MICROWAVE
	2400 Centrepark West Drive, Suite 100
	West Palm Beach, FL 33409
TITLE:	

SMA JACK TO JACK ADAPTER

	95077	DWG.	NO.	SF2992	2-6001
SCALE: 12:1					SHEET 1 OF