P.1/8

# CHIP COIL (CHIP INDUCTORS) LQM21PN

#### 1. Scope

This reference specification applies to LQM21PNDDDEH, Chip Coil (Chip Inductors).

#### 2. Part Numbering

(ex)	LQ	M	21	P	N	1R0	Μ	Е	н	D
	Product ID	Struture	Dimension	Applications	Category	Inductance	Tolerance	Dimension	Other	Packaging
			$(L \times W)$	and				(T)		D: Taping
				Characterist	tics					*B: Bulk

\*Bulk packing also available. (A product is put in the plastic bag under the taping conditions.)

#### 3. Rating

<ul> <li>Operating Temperature Range</li> </ul>	$-40^{\circ}$ C to $+85^{\circ}$ C
Storage Temperature Range	$-40^{\circ}$ C to $+85^{\circ}$ C

Otoruge		+00101	000							
		Inductance		DC		Self	*3 Rated Current(A)			
Customer Part Number	MURATA Part Number	(µH)	Tolerance (%)	Resist (m ohr		Resonant Frequency (MHz min.)	*1 (Based on *2(Based on Inductance change)			
		(μ1)	(70)	Тур	Max		Тур	Тур	Max	
	LQM21PNR24MEHD	0.24		40	50	130	3.1	2.8	2.9	2.4
	LQM21PNR47MEHD	0.47		60	75	80	1.8	1.5	2.4	1.9
	LQM21PN1R0MEHD	1.0	±20%	85	107	50	1	0.8	2	1.6
	LQM21PN1R5MEHD	1.5		100	125	40	0.55	0.4	1.8	1.5
	LQM21PN2R2MEHD	2.2		175	219	30	0.45	0.3	1.4	1.1

\*1: When applied Rated current to the Products, Inductance will be within ±30% of initial inductance value range.


\*2: When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 40°C max.

\*3: Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

# 4. Testing Conditions

《Unless otherwi	《Unless otherwise specified》			
Temperatur	e : Ordinary Temperatur	Temperature	e : 20°C ± 2°C	
Humidity	: Ordinary Humidity	/ 25%(RH) to 85%(RH)	) Humidity	: 60%(RH) to 70%(RH)
			Atmospheric	Pressure : 86kPa to 106kPa

#### 5. Appearance and Dimensions



Unit Mass (Typical value) 0.010g Spec No. JELF243B-0070-01

# **Reference Only**

P.2/8

### 6. Electrical Performance

No.	Item	Specification	Test Method
6.1	Inductance	Meet item 3.	Measuring Equipment: Agilent 4294A or equivalent (1mA) Measuring Frequency: 1MHz
6.2	DC Resistance		Measuring Equipment: Digital multi meter Digital multi meter (TR6846 or equivalent) terminal 1 SW b C resistance shall be measured after putting chip coil between the terminal 2 under the condition of opening between a and b. Every measurement the terminal 1 shall be shorted between a and b when changing chip coil.
6.3	Self Resonant Frequency (S.R.F)		Measuring Equipment: Agilent 4294A or equivalent

# 7. Mechanical Performance

No.	Item	Specification	Test Method
7.1	Shear Test	Chip coil shall not be damaged after tested as follows.	Applied Direction Chip Coil Substrate Force: 10N Hold Duration: 5s±1s Applied Direction: Parallel to PCB
7.2	Bending Test	Appearance: No damage	Substrate: Glass-epoxy substrate (100mm × 40mm × 1.0mm) Pressure jig C230 J – Deflection (in mm) 45 45 Product Speed of Applying Force: 0.5mm / s Deflection: 2mm Hold Duration: 30 s

P.3/8

No.	Item	Specification	Test Method
7.3	Vibration	Appearance: No damage	Oscillation Frequency: 10Hz to 2000Hz to 10Hz for 20 min Total amplitude 3.0 mm or Acceleration amplitude 245m/s <sup>2</sup> whichever is smaller. Testing Time: A period of 4h in each of 3 mutually perpendicular directions.
7.4	Drop		It shall be dropped on concrete or steel board. Method : free fall Height : 1m Total of 10 cycles
7.5	Solderability	The wetting area of the electrode shall be at least 90% covered with new solder coating.	Flux: Ethanol solution of rosin 25(wt)% (Immersed for 5s to 10s) Solder: Sn-3.0Ag-0.5Cu Pre-Heating: 150°C±10°C / 60s to 90s Solder Temperature: 240°C±5°C Immersion Time: 3s±1s
7.6	Resistance to Soldering Heat	Appearance: No damage Inductance Change: within ±30%	Flux: Ethanol solution of rosin 25(wt)% (Immersed for 5s to 10s) Solder: Sn-3.0Ag-0.5Cu Pre-Heating: 150°C±10°C / 60s to 90s Solder Temperature: 270°C±5°C Immersion Time: 10s±1s Then measured after exposure in the room condition for 24h±2h.


### 8. Environmental Performance

It shall be soldered on the substrate.

No.	Item	Specification	Test Method
8.1	Heat Resistance	Appearance: No damage	Temperature: 85°C±2°C
		Inductance Change: within ±30%	Time: 1000h (+48h, -0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.2	Cold Resistance		Temperature: -40°C±2°C
			Time: 1000h (+48h, -0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.3	Humidity		Temperature: 40°C±2°C
			Humidity: 90%(RH) to 95%(RH)
			Time: 1000h (+48h, -0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.4	Temperature		1 cycle:
	Cycle		1 step: -40°C±2°C / 30 min±3 min
			2 step: Ordinary temp. / 10 min to 15 min
			3 step: 85°C±2°C / 30 min to 3 min
			4 step: Ordinary temp. / 10 min to15 min
			Total of 100cycles
			Then measured after exposure in the room
			condition for 24h±2h.

## 9. Specification of Packaging

9.1 Appearance and Dimensions of paper tape (8mm-wide)

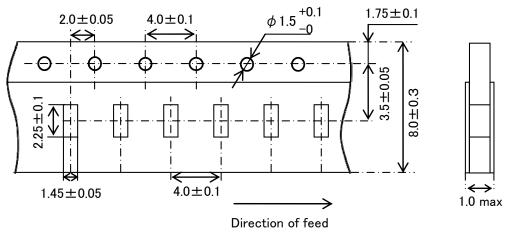

• Dimension of the Cavity is measured at the bottom side.

#### 9.2 Specification of Taping

- (1) Packing quantity (standard quantity)
  - 3,000 pcs. / reel
- (2) Packing Method

Products shall be packed in the cavity of the base tape and sealed by top tape and bottom tape.

(3) Sprocket hole

The sprocket holes are to the right as the tape is pulled toward the user.

(4) Spliced point

Base tape and Top tape has no spliced point.

(5) Missing components number


Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The Specified quantity per reel is kept.

#### 9.3 Pull Strength

Plastic tape	10N min.
Cover tape	5N min.


#### 9.4 Peeling off force of Top tape

Speed of Peeling off	300mm/ min
Peeling off force	0.1 to 0.7N
	(minimum value is typical)



#### 9.5 Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (top tape and empty tape) and trailer-tape (empty tape) as follows.

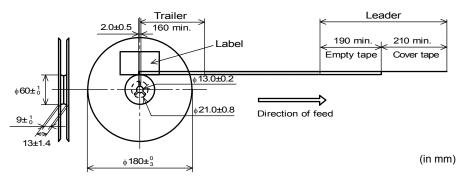

Spec No. JELF243B-0070-01

#### 9.6 Marking for reel

Customer part number, MURATA part number, Inspection number (\*1), RoHS marking (\*2), Quantity etc ···

Reference Only

*1) <expression inspection="" no.<="" of="" th=""><th><math>&gt; \qquad \qquad</math></th></expression>	$> \qquad \qquad$
(1) Factory Code (2) Date First digit	: Year / Last digit of year
Second digit Third, Fourth	: Month / Jan. to Sep. $\rightarrow$ 1 to 9, Oct. to Dec. $\rightarrow$ O, N, D
(3) Serial No.	

\*2) <Expression of RoHS marking >

 $ROHS - \frac{Y}{(1)} (\underline{\Delta})$ 

P.5/8


(1) RoHS regulation conformity parts.

(2) MURATA classification number

#### 9.7 Marking for Outside package (corrugated paper box)

Customer name, Purchasing order number, Customer part number, MURATA part number, RoHS marking (\*2), Quantity, etc ···

#### 9.8. Specification of Outer Case



### 10. 🕂 Caution

#### **Limitation of Applications**

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.


- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- 4) Power plant control equipment
- (5) Medical equipment
- (6) Transportation equipment (vehicles, trains, ships, etc.)(7) Traffic signal equipment
- (8) Disaster prevention / crime prevention equipment
  - (9) Data-processing equipment
- (10) Applications of similar complexity and /or reliability requirements to the applications listed in the above

#### 11. Notice

This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

#### 11.1 Land pattern designing



Operating				Land	pad thic	kness
Current	а	b	с	and dimension d		
(A)	ŭ	2	0	18µm	35µm	70µm
0 to 1.0		3.0		1.0	1.0	1.0
1.0 to 1.5	1.2	to	1.0	1.5	1.0	1.0
1.5 to 3.1		4.0		3.0	1.5	1.0

(in mm)

## MURATA MFG. CO., LTD.

#### 11.2 Flux, Solder

·Use rosin-based flux.

Don't use highly acidic flux with halide content exceeding 0.2(wt) % (chlorine conversion value). Don't use water-soluble flux.

- ·Use Sn-3.0Ag-0.5Cu solder.
- Standard thickness of solder paste:  $100 \,\mu$  m to  $150 \,\mu$  m.

#### 11.3 Reflow soldering conditions

· Products can be applied to reflow soldering.


•Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150°C max. Cooling into solvent after soldering also should be in such a way that the temperature difference is limited to 100°C max.

Insufficient pre-heating may cause cracks on the product, resulting in the deterioration of products quality.

· Standard soldering profile and the limit soldering profile is as follows.

The excessive limit soldering conditions may cause leaching of the electrode and/or resulting in the deterioration of product quality.

Reflow soldering profile

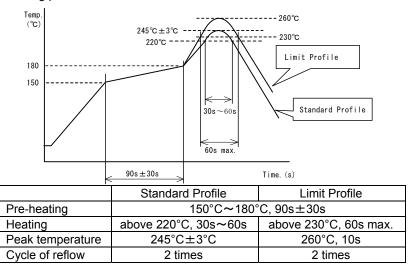

#### 11.4 Reworking with soldering iron

The following conditions must be strictly followed when using a soldering iron.


Pre-heating	150°C, 1 min
Tip temperature	350°C max.
Soldering iron output	80W max.
Tip diameter	$\phi$ 3mm max.
Soldering time	3(+1, -0)s
Time	2 times

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

#### 11.5 Solder Volume

·Solder shall be used not to be exceeded the upper limits as shown below.

•Accordingly increasing the solder volume, the mechanical stress to Chip is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.



#### Spec No. JELF243B-0070-01

# **Reference Only**

P.7/8


### 11.6 Product's location

The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.

[Products direction]

(2) Products location on P.C.B. separation



Products shall be located in the sideways direction (Length: a(b) to the mechanical stress.

Products (A, B, C, D) shall be located carefully so that products are not subject to the mechanical stress due to warping the board.

Because they may be subjected the mechanical stress in order of A>C>B $\cong$ D.

#### **11.7 Cleaning Conditions**

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max. (40°C max for IPA.)
- (2) Ultrasonic cleaning shall comply with the following conditions with avoiding the resonance phenomenon at the mounted products and P.C.B.
  - Power : 20 W / I max. Frequency : 28kHz to 40kHz Time : 5 min max.
- (3) Cleaner
  - 1. Alcohol type cleaner Isopropyl alcohol (IPA)
  - 2. Aqueous agent
    - PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning. In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.
- (5) Other cleaning Please contact us.

#### 11.8 Resin coating

The inductance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating/molding products. So please pay your careful attention when you select resin.

In prior to use, please make the reliability evaluation with the product mounted in your application set.

#### 11.9 Caution for use

There is possibility that the inductance value change due to magnetism. Don't use a magnet or a pair of tweezers with magnetism when chip coil are handled. (The tip of the tweezers should be molded with resin or pottery.)

#### **11.10 Magnetic Saturation**

When the excessive current over rated current is applied, the inductance value may change due to magnetism.




#### 11.11 Handling of a substrate


After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.

Bending

Twisting





#### **11.12 Storage and Handing Requirements**

(1) Storage period

Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded.

(2) Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature : -10°C to 40°C

Humidity : 15% to 85% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

• Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

• Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be stored under the airtight packaged condition.

(3) Handling Condition

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

# 12. 🕂 Note

- (1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3) The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.